



FOR ACCURATE DIAL READING (12° - 18°) CORRECT
POINT ANGLE.

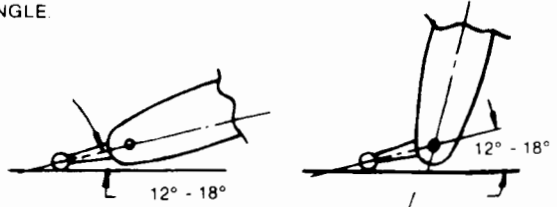

INCORRECT POINT ANGLE.

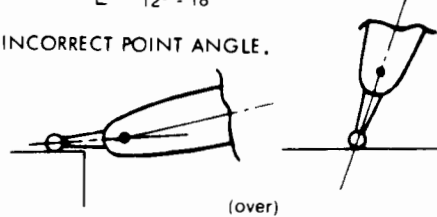

NOTE: For maximum reading and accuracy mounting of Indicator
with accessories must be rigid.

On all Gem Indicators - contact points must be properly
seated in serrations and tight.

Gem Instrument Co.

Brunswick, Ohio 44212